




# Wall Mount Speaker (Dampproof)

## T-774H/T-775H/T-776H/T-778H

## T-774HW/T-775HW/T-776HW/T-778HW



Material: plastic

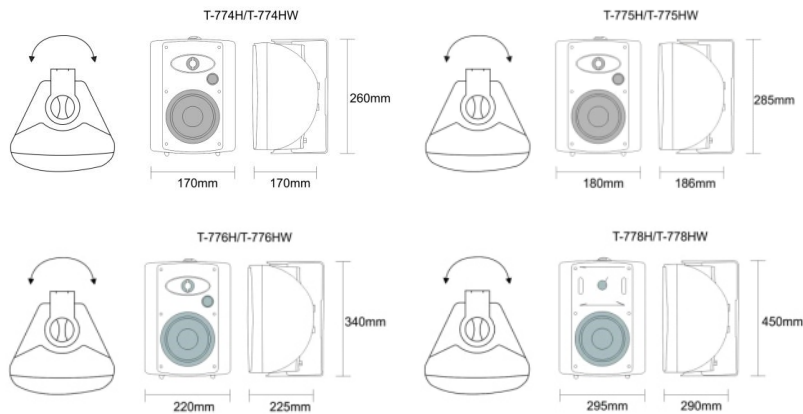

### Description:

Indoor high-grade wall-mounted speakers, multi-power fixed resistance and fixed pressure selection, modern sense of arc design, 2 frequency division design, high cost performance, convenient installation. Suitable for hotels, conference halls, etc.

### Specifications:

| Model                      | T-774H/T-774HW            | T-775H/T-775HW              | T-776H/T-776HW          | T-778H/T-778HW             |
|----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|
| Power taps @100V           | 2.5W, 5W, 10W, 20W        | 3.75W, 7.5W, 15W, 30W       | 5W, 10W, 20W, 40W       | 7.5W, 15W, 30W, 60W        |
| Power taps @70V            | 1.25W, 2.5W, 5W, 10W, 20W | 1.9W, 3.75W, 7.5W, 15W, 30W | 2.5W, 5W, 10W, 20W, 40W | 3.75W, 7.5W, 15W, 30W, 60W |
| Impedance                  | 4KΩ/2KΩ/1KΩ/500Ω/250Ω     | 2.6KΩ/1.3KΩ/670Ω/330Ω/165Ω  | 2KΩ/1KΩ/500Ω/250Ω/125Ω  | 1.3KΩ/670Ω/330Ω/165Ω/81Ω   |
| Input                      | 70V/100V/8Ω               | 70V/100V/8Ω                 | 70V/100V/8Ω             | 70V/100V/8Ω                |
| SPL(1W/1M)                 | 86dB                      | 88dB                        | 89dB                    | 89dB                       |
| Frequency response (-10dB) | 120-18KHz                 | 100-18KHz                   | 100-20KHz               | 100-20KHz                  |
| Speaker driver             | 4" x 1 1.5" x 1           | 5" x 1 1.5" x 1             | 6" x 1 1.5" x 1         | 8" x 1 2" x 1              |
| Dimensions                 | 260 x 170 x 170mm         | 285 x 180 x 186mm           | 340 x 220 x 225mm       | 450 x 295 x 290mm          |
| Weight                     | 2.3kg                     | 2.7kg                       | 4.1kg                   | 6.5kg                      |
| Protection level           | IP66                      | IP66                        | IP66                    | IP66                       |